


Deka's rugged
Outdoorsman line
provides maintenance-
free performance.

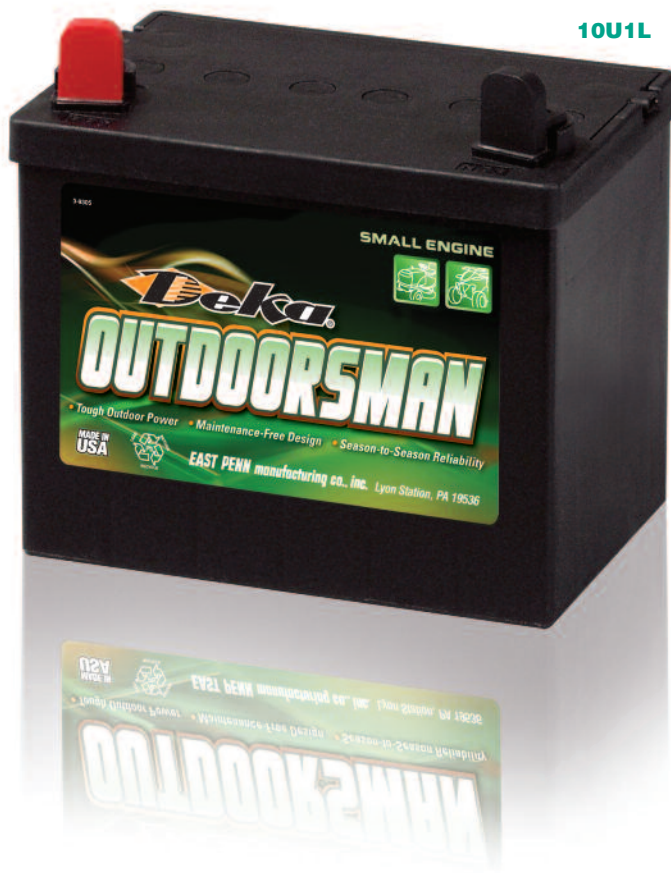

10U1L

Key Features and Benefits of the Deka Lawn & Garden/Small Engine Line

- **Plenty of cranking amps** to power tractors and recreational vehicles across the roughest terrain. Outdoorsman batteries have the power to perform in winter's bitter cold and summer's scorching heat.
- A calcium **maintenance-free design**, eliminates the need to add water and delivers more power-per-pound and **longer storage life** season after season.
- The **flush cover** eliminates the danger of harmful acid spills and lost vent caps, providing **safer and easier operation**. Flush cover batteries replace original equipment batteries more easily because there are no pod vents to interfere with hold-downs and cables.
- **Envelope separators** protect all sides of the plates, preventing internal shorting and providing **superior cranking capacity**.
- Tough **lightweight polypropylene cases** resist breakage under the roughest conditions.
- More than **250 quality control checks** guarantee the highest quality.

Deka L&G/Small Engine Batteries

GRP. NO.	PART NO.		FOOTNOTES	PERFORMANCE LEVEL				QUARTS (LITERS) OF ACID	APPROXIMATE WEIGHT lbs (kgs.)		MAXIMUM OVERALL DIMENSIONS inches (mm)		
	WET	DRY		CCA @ 0°F	RESERVE CAPACITY	A.H. @ 10 HRS.	REF. CA @ 32°F		WET	DRY	L	W	H
12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE-FREE													
U1	11U1L	—	22,Z	350	—	—	410	—	19 (8.6)	—	7 1/4 (197)	5 1/2 (130)	7 1/4 (184)
	10U1L	—	22,Z	300	—	—	365	—	17 (7.7)	—			
	8U1L	8U1LD	8,22,23,30,Z	230	—	—	275	—	15.5 (7.0)	10.5 (4.8)			
	7U1L	—	22,Z	195	—	—	235	—	15 (6.8)	—			
	4U1L	—	22,Z	150	—	—	175	—	14 (6.4)	—			
U1R	10U1R	—	22,Y	300	—	—	365	—	17 (7.7)	—	7 1/4 (197)	5 1/2 (130)	7 1/4 (184)
	8U1R	8U1RD	8,22,23,30,Z	230	—	—	275	—	15.5 (7.0)	10.5 (4.8)			
	7U1R	—	22,Y	195	—	—	235	—	15 (6.8)	—			
22F	522FMF	—	—	425	65	—	540	—	31.5 (14.3)	—	9 3/8 (238)	6 1/4 (171)	8 3/4 (210)
22NF	322NF	—	12	360	58	—	430	—	29 (13.2)	—	9 3/8 (238)	5 1/2 (140)	9 (229)

U1 = left front positive; U1R = right front positive (with terminal side of battery facing you)

OTHER 12-VOLT BATTERIES USED IN LAWN & GARDEN/SMALL ENGINE APPLICATIONS													
26	526MF	—	17,18,22,37	540	80	—	665	—	30.0 (13.6)	—	8 3/8 (222)	6 1/4 (171)	8 (203)
	426MF	—	17,18,22,37	450	55	—	560	—	27 (12.2)	—	—	—	—
26R	526RMF	—	17,18,22,37	540	80	—	665	—	30.0 (13.6)	—	8 3/8 (222)	6 1/4 (171)	8 (203)
	426RMF	—	17,18,22,37	450	55	—	560	—	27 (12.2)	—	—	—	—
	12N103A2	—	—	—	—	10	—	—	—	5.8 (2.6)	5 1/8 (135)	3 3/8 (90)	5 1/2 (146)
	12N12A-4A-1	—	30	—	—	12	—	—	—	6.8 (3.1)	5 1/8 (135)	3 3/8 (81)	6 1/8 (160)
	12N14-3A	—	30	—	—	14	—	—	—	7.5 (3.4)	5 1/8 (135)	3 1/2 (89)	6 3/8 (167)
	12N16-3B	—	30	—	—	16	—	—	—	11.8 (5.4)	6 1/4 (175)	4 (102)	6 1/2 (156)
	12N9-3A	—	30	—	—	9	—	—	—	5.4 (2.4)	5 1/8 (135)	3 (76)	5 1/2 (140)
	12N9-4B-1	—	30	—	—	9	—	—	—	5.4 (2.4)	5 1/8 (135)	3 (76)	5 1/2 (140)
	40B19L(S)	—	30	275	52	—	—	2 1/2 (2.5)	—	16.5 (7.5)	7 1/4 (197)	5 1/8 (129)	8 15/16 (227)
46B24R	—	—	30	330	75	—	—	3 1/2 (3.3)	—	19.8 (9)	—	—	—
	46B24L(S)	—	30	330	75	—	—	3 1/2 (3.3)	—	19.8 (9)	9 3/8 (206)	5 1/8 (129)	8 15/16 (227)
NS60	—	—	—	330	75	—	—	—	—	19.8 (9)	—	—	—
	NS60L	—	—	330	75	—	—	—	—	19.8 (9)	9 3/8 (206)	5 1/8 (129)	8 15/16 (227)
Y50-N18L-A	—	—	30	—	—	20	—	—	—	11.2 (5.1)	—	—	—
	Y50-N18L-A3	—	30	—	—	20	—	—	—	11.2 (5.1)	8 3/8 (206)	3 3/8 (91)	6 1/2 (162)
YB9-B	—	—	30	—	—	9	—	—	—	5.3 (2.4)	5 1/8 (135)	3 (76)	5 1/2 (140)
	YB10L-A2	—	30	—	—	11	—	—	—	7.0 (3.2)	5 1/8 (135)	3 3/8 (90)	5 1/2 (146)
	YB12A-A	—	30	—	—	12	—	—	—	6.8 (3.1)	5 1/8 (135)	3 3/8 (81)	6 1/8 (160)
	YB14L-A2	—	30	—	—	14	—	—	—	7.6 (3.4)	5 1/8 (135)	3 1/2 (89)	6 1/8 (167)
	YB16-B	—	30	—	—	19	—	—	—	10.5 (4.8)	6 1/4 (175)	4 (102)	6 1/2 (156)
	YB16-B-LM	—	30	—	—	19	—	—	—	10.5 (4.8)	6 1/4 (175)	4 (102)	6 1/2 (156)
	YB16CLB	—	30	—	—	19	—	—	—	10.1 (4.5)	6 1/4 (175)	4 (102)	6 1/2 (156)
	YB16L-B	—	30	—	—	19	—	—	—	10.5 (4.8)	6 1/4 (175)	4 (102)	6 1/2 (156)

OTHER 12-VOLT AGM BATTERIES USED IN LAWN & GARDEN/SMALL ENGINE APPLICATIONS													
	ETX15	—	2,38,39,42,76	220	—	14	—	—	11.3 (5.1)	—	5 1/4 (134)	3 1/2 (89)	6 1/8 (167)
	ETX15L	—	2,38,39	220	—	14	—	—	11.3 (5.1)	—	5 1/4 (134)	3 1/2 (89)	6 1/8 (167)
	ETX16	—	2,38,39,42,74	325	—	19	—	—	17 (7.7)	—	6 1/4 (175)	4 (102)	6 1/2 (156)
	ETX18L	—	2,38,39	340	—	20	—	—	18 (8.2)	—	8 1/4 (206)	3 3/8 (91)	6 1/2 (163)
	ETX30L	—	2,38,39	400	—	26	—	—	21.5 (9.8)	—	6 1/2 (168)	5 1/8 (131)	6 1/2 (175)
YT4L-BS	—	30	50	—	3	—	—	—	2.9 (1.3)	4 1/2 (114)	2 1/8 (71)	3 3/8 (86)	
YTX14AHBS	—	—	30	210	—	12	—	—	11.1 (5.0)	—	5 1/8 (135)	3 1/2 (89)	6 1/8 (167)
	YTX14AHLBS	—	30	210	—	12	—	—	11.1 (5.0)	—	5 1/8 (135)	3 1/2 (89)	6 1/8 (167)
	YTX20BS	—	30	270	—	18	—	—	—	11.2 (5.1)	6 1/4 (164)	3 1/8 (88)	6 1/2 (156)
	YIX30L	—	97	385	—	30	—	—	22 (10)	—	6 1/8 (167)	5 (127)	6 1/2 (175)

All batteries have maintenance-free calcium grids except where noted.


All batteries except Powersports have SAE automotive posts unless noted.

All batteries manufactured in polypropylene cases and covers except where noted. Maintenance-free batteries have microporous, polyethylene envelope separators

FOOTNOTES:

- 2 - Black cover / Gray case
- 8 - Dry charged batteries have black covers & white cases
- 11 - Low maintenance - low antimony grids
- 12 - Hybrid construction
- 14 - Centerline terminal posts
- 17 - Includes handle
- 18 - Includes top adapter
- 19 - Includes lifting edges
- 21 - Anchor lock elements
- 20 - Hard rubber, multi-cell cover construction
- 22 - Flush manifold vented cover

- 23 - Flush manifold vented cover when shipped wet, standard cover when shipped dry or FP
- 30 - Available dry-add "D" suffix to part number
- 37 - For height with adapter add 7/8" (22 mm)
- 42 - For height with adapter add 7/8" (22 mm)
- 74 - Shipped with 20mm adapter
- 97 - AGM, activated, ready to install
- S - SAE "automotive type" post
- Y - Small L terminal with round holes
- Z - Small L terminal with square holes



East Penn Manufacturing Co. Lyon Station, PA 19536-0147 Phone: 610-682-6361 Fax: 610-682-4781 www.dekabatteries.com

