MORE POWER - LESS SPACE®



12AVR200ET

- Exclusive IPF® technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced AGM technology for superior power
- Puncture resistant micro-porous glass mat separators extend life
- Front access design for easy installation and maintenance
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy sealed posts eliminate leaks
- Flame arresting, low-pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188
- Designed to meet GR4228 specifications
- 48 volt system fits in 23" relay rack tray



SPECIFICATIONS

Nominal Voltage: 12-Volts

Rating: 200 Ampere-Hours

@ 8 hr. rate to 1.75 V.P.C.

Positive Plate: >98% Pure lead with tin-calcium alloy

Negative Plate: Pure lead, calcium alloy

Post Seal: Epoxy-sealed

Terminal: Front access, 1/4" – 20 threaded insert

Case/Cover: Flame-retardant, THT™ -

UL 94 V-0/>39% L.O.I.

Safety Vent: Low positive pressure,

self-sealing w/ flame arrestor

Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)

Design life: 10 years in float applications @ 77°F (25°C)

Dimensions: Length - 24.30" (617.2 mm)


Width - 4.97" (126.3 mm)

Height - 12.74" (323.5 mm)

Weight: 150 lbs. (68 kg)

DISCHARGE RATINGS IN AMPS @ 77°F (25°C)†									
Volts per Cell (V.P.C.)	1 HR.	2 HR.	3 HR.	4 HR.	5 HR.	8 HR.	12 HR.	20 HR.	24 HR.
1.75	152	86.3	60.3	46.7	38.3	25.0	17.2	10.6	8.9
1.80	143	83.2	58.3	45.3	37.2	24.4	16.8	10.4	8.7
1.85	130	77.0	54.7	42.7	35.2	23.2	16.1	9.9	8.4
1.88	119	71.6	51.3	40.3	33.3	22.1	15.3	9.5	8.0
1.90	110	67.3	48.6	38.3	31.7	21.1	14.6	9.1	7.6

†Subject to change without notice.

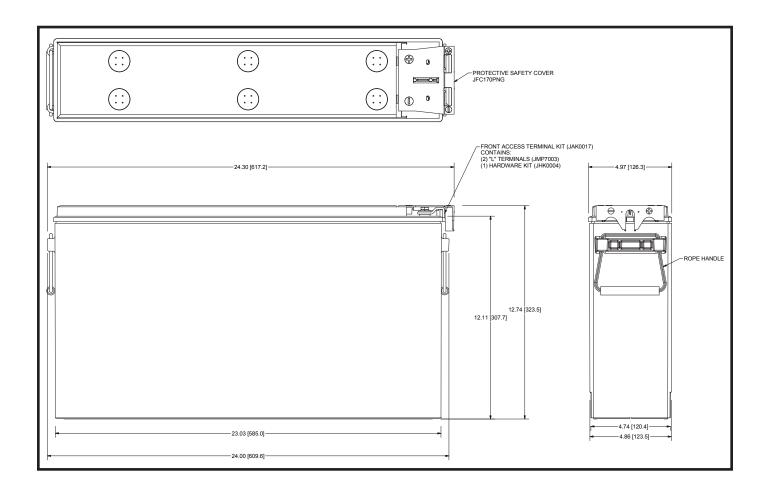

INSTALLATION AND OPERATING INSTRUCTIONS

• http://www.eastpennmanufacturing.com/wp-content/uploads/Unigy-I-IO-Manual-0902.pdf



www.dekabatteries.com





