


MORE POWER - LESS SPACE™



unigy II

Tomorrow's energy systems...today

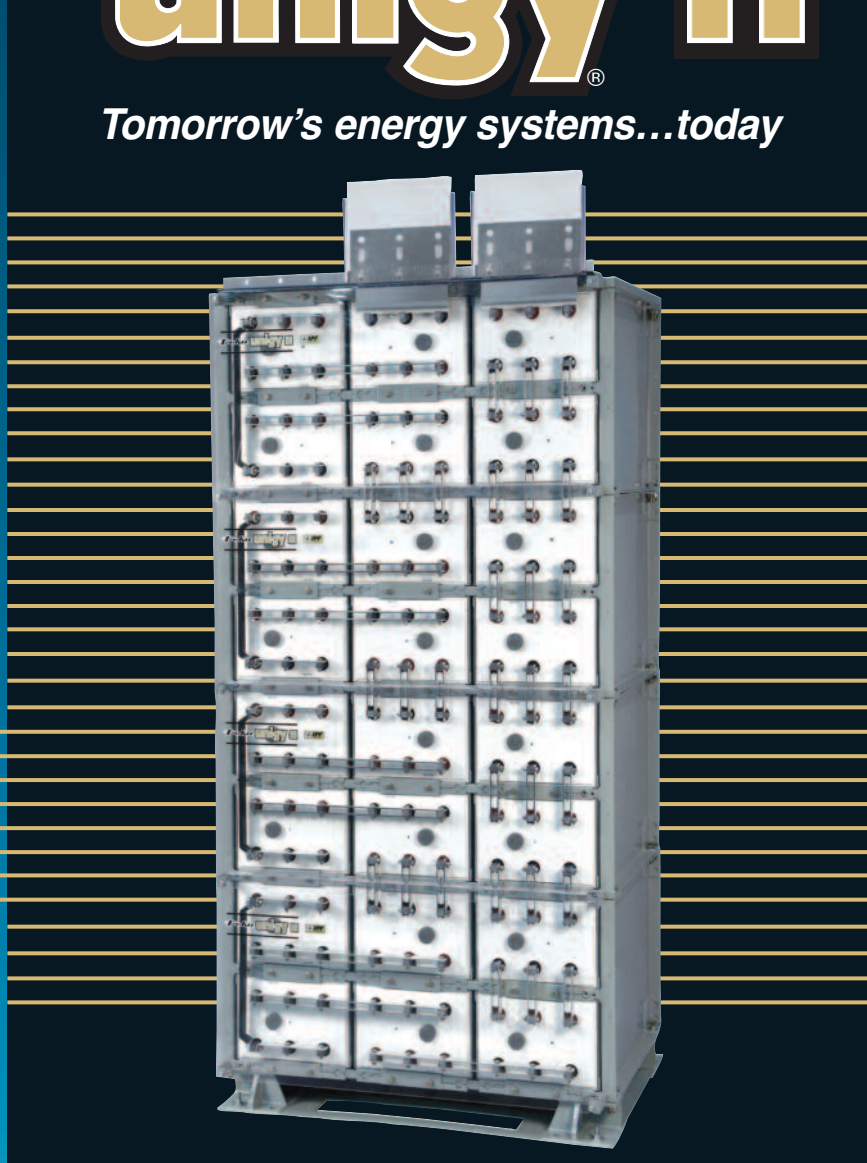

**2000 AH
DESIGN**

**EXCLUSIVE
IPF®
TECHNOLOGY**

**INDIVIDUAL
STEEL CANS
FOR EACH
CELL**

**NEBS
ZONE 4
CERTIFIED**

**MICROCAT™
VENT**



QUALITY SYSTEM
CERTIFIED TO
ISO 9001
ISO/TS 16949
ISO 14001


Made in U.S.A.

AVR125 - 33									
AMPERES @ 77° (25°C)									
Volts Per Cell (V.P.C.)	Discharged Times – Hours								
	3 Hr.	4 Hr.	5 Hr.	6 Hr.	8 Hr.	10 Hr.	12 Hr.	20 Hr.	24 Hr.
1.75	517	414	352	309	250	210	182	118	101
1.80	502	408	348	306	248	208	180	117	100
1.85	472	390	336	297	241	203	176	114	97.7

No. Cells/Module	Module Configuration (Width x Height)	No. Plates / Cell	Module Volts	Part Number	Amp Hour C8@1.75 V.P.C.	Dimensions			Weight(kg)
						Length(mm)	Width(mm)	Height(mm)	
4	2 x 2	33	8	AVR125-33	2000	29.55" (751)	31.00" (737)	19.86" (504)	1484 lb (673)
6	3 x 2	33	12	AVR125-33	2000	42.83" (1088)	31.00" (737)	19.86" (504)	2194 lb (995)

- Flame retardant polypropylene jar and cover standard.
- **LENGTH** – To calculate overall length for multiple stack systems, add 4" to module length and multiply by number of stacks, then subtract 4" from total.
- **DEPTH** – Includes front shield.
- **HEIGHT** – For module stack height, multiply the module heights times the number of modules and then add 4" for base.
- **TERMINATION**
Side Termination – add 8" (4" per side) to total length.
Top termination – add 8" to total height.
- **WEIGHT** – includes module plus cells, but not cell hardware or base.
- Please refer to the I&O Manual, systems operation, float voltages for proper charger setting.

NOTE: Multiple stack systems require a minimum of 4.00" spacing between stack. The additional spacing is for proper installation of modules.

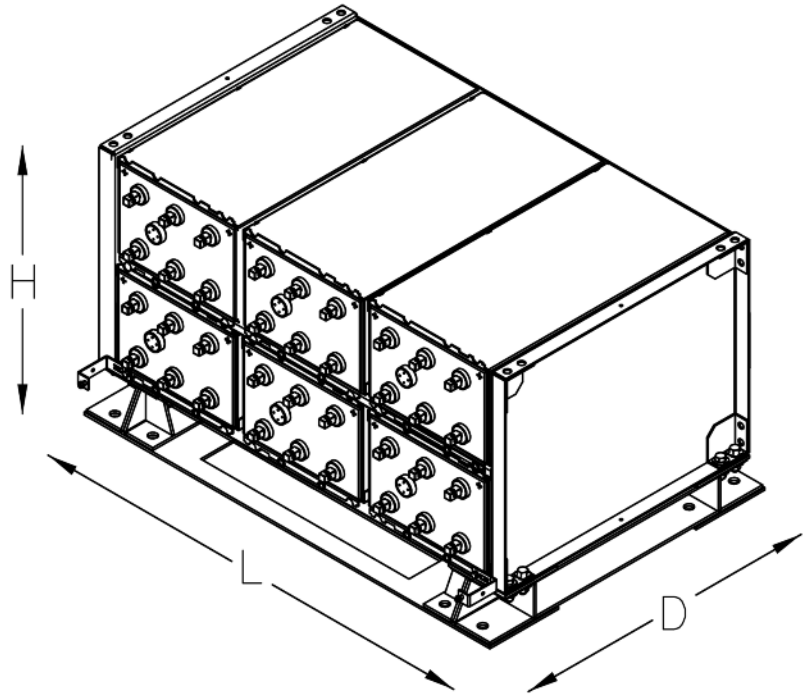

DISTRIBUTED BY: