

8G4DF

- Exclusive IPF® technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced gel technology for superior high-rate power
- Front access design for easy installation and maintenance
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Certified to YD/T1360-2005 standards by TLC battery test center



SPECIFICATIONS

Nominal Voltage: 12-Volts

Rating: 553 Watts/Cell@15 min. rate

to 1.67 V.P.C.

Positive Plate: Pure lead, low-calcium, high-tin alloy

Negative Plate: Lead calcium alloy Post Seal: Epoxy-sealed

Terminal: Front access, 1/4" – 20 threaded insert

Container: Flame-Retardant, polypropylene –

UL 94 V-0/>28% L.O.I.

Safety Vent: Low positive pressure.

self-sealing w/ flame arrestor

Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. (Range: 13.44V

to 13.56V per battery)

Design life: 15 years in float applications at 68°F (20°C)

Dimensions: Length - 20.77" (527 mm)


Width - 8.43" (214 mm) Height - 9.35" (237 mm)

Weight: 141 lbs. (64.0 kg)

DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)†

| _ | DISCHARGE RAINTOS IN WAITS FER CELL @ 77 1 (25 C) | | | | | | | |
|---|---|--------|---------|---------|---------|---------|---------|---------|
| | Volts Per Cell (V.P.C.) | 5 MIN. | 10 MIN. | 15 MIN. | 20 MIN. | 30 MIN. | 45 MIN. | 60 MIN. |
| | 1.67 | _ | _ | 553 | 463 | 349 | 283 | 233 |
| | 1.75 | _ | _ | 522 | 443 | 339 | 276 | 228 |
| | 1.80 | _ | _ | 493 | 427 | 322 | 263 | 219 |

[†] Subject to change without notice.

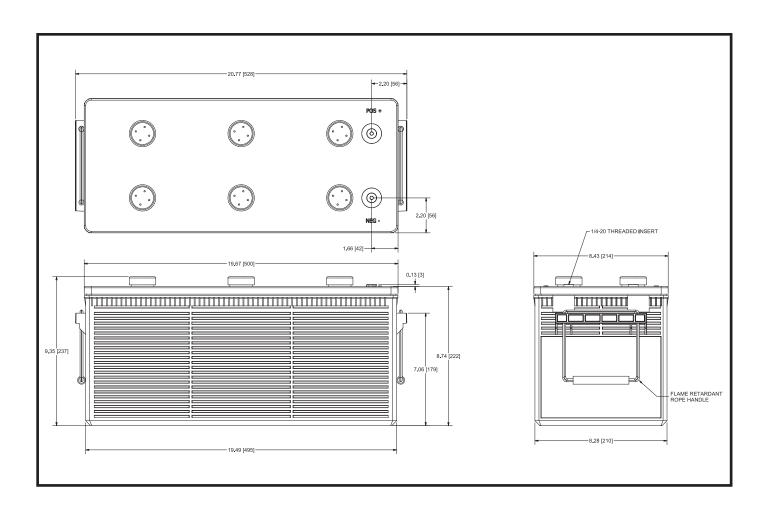









www.dekabatteries.com