

MORE POWER - LESS SPACE®



HIGH RATE SERIES

HR5500ET

- Exclusive IPF® Technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Front access design for easy installation and maintenance
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



SPECIFICATIONS


Nominal Voltage: 12-Volts
Rating: 550 Watts/Cell @ 15 min. rate to 1.67 V.P.C.
Positive Plate: > 98% Pure lead with tin-calcium alloy
Negative Plate: Pure lead, calcium alloy
Post Seal: Epoxy-sealed
Terminal: Front access, 1/4" – 20 threaded insert
Case/Cover: Flame-retardant, polypropylene – UL 94 V-0/>28% L.O.I.

Safety Vent: Low positive pressure, self-sealing w/ flame arrestor
Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)
Design life: 10 years in float applications @ 77°F (25°C)
Dimensions: Length - 21.84" (554.7 mm)
 Width - 4.97" (126.3 mm)
 Height - 11.64" (295.7 mm)
Weight: 115 lbs. (52 kg)

DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)†

Volts per Cell (V.P.C.)	1 MIN.	5 MIN.	10 MIN.	15 MIN.	20MIN.	30 MIN.	40 MIN.	50 MIN.	60 MIN.
1.60	N/A	946	712	576	471	369	297	250	218
1.63	N/A	913	695	567	464	367	295	250	218
1.65	N/A	888	682	558	459	363	293	248	217
1.67	N/A	864	670	550	453	360	291	247	216
1.70	N/A	828	647	535	443	356	288	245	215
1.75	N/A	749	602	506	420	344	280	239	210

†Subject to change without notice.

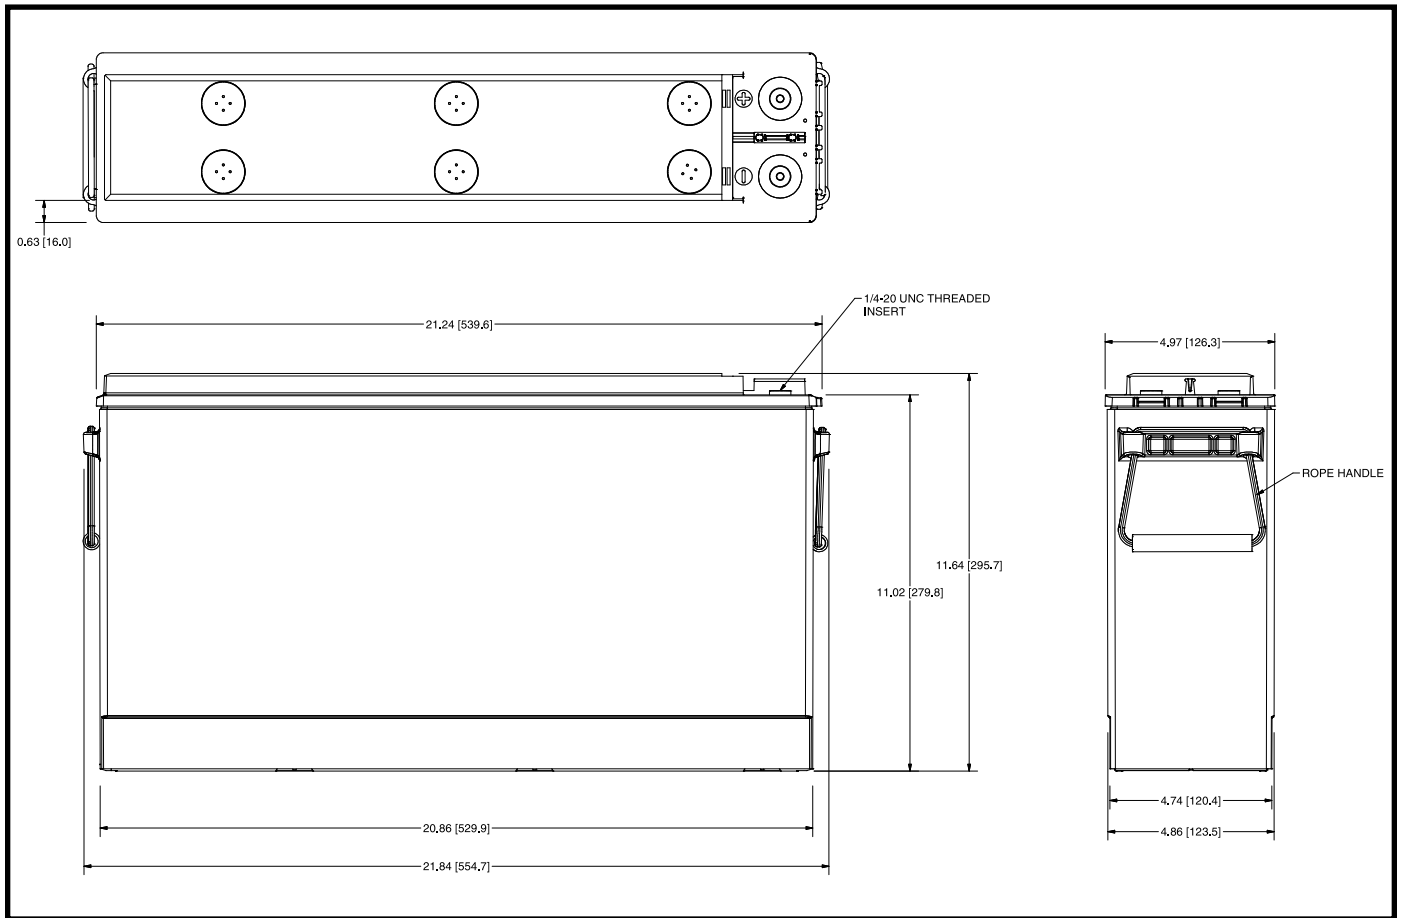


OPTIONAL FACTORY ACCEPTANCE TESTING

- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information

TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String \geq 100% capacity — All individual batteries \geq 95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes



INSTALLATION AND OPERATING INSTRUCTIONS

- <http://www.eastpennmanufacturing.com/wp-content/uploads/High-Rate-IO-Manual-0970.pdf>



www.dekabatteries.com



East Penn Manufacturing Co. Lyon Station, PA 19536-0147 Phone: 610-682-3263 Fax: 610-682-0891 e-mail: reservepowersales@dekabatteries.com